








REINFORCEMENT DETAIL OF COLUMNS				
COLUMN SIZE		L	10"	10"
		B	15"	15"
CONC.MIX			M20(1:1.5:3)	M20(1:1.5:3)
1st Floor To Roof		Section with main steel	 4-16+ 2-12Ø	 6-12Ø
Foundation to 1st Floor		Section with main steel	 4-16+ 2-12Ø	 6-12Ø
		8Ø LINKS@4 " & 6"C/C		
Column type as Marked			A1,A3,A4,B1,C2,C4 D1,D2,D4,E1,E2,E4	B3,B4

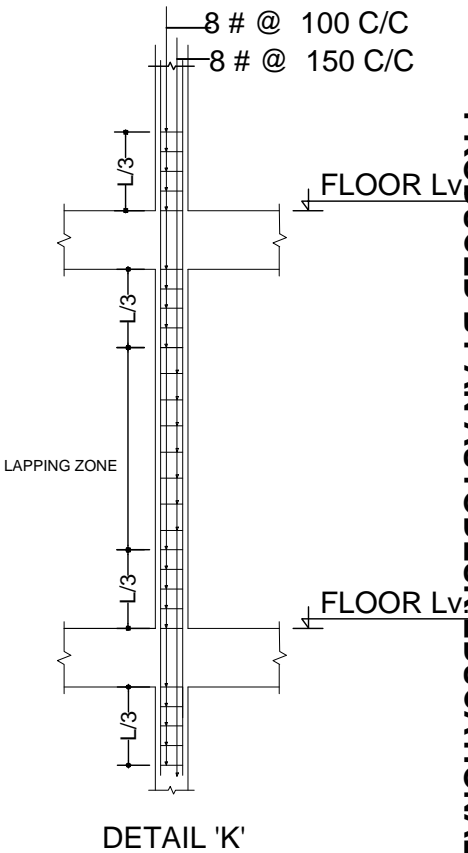

SOUTH

Drawing Title: COLUMN REIN.DETAILS	Drawing No.: 88/2022	CHECKED BY:	Approved By:	
Project Name: RESEDENTIAL (G+1)	Revision No.: 01	ER.ANKIT SINGH	ER.ROHIT SINGH	SCALE : 1:100
CLIENT Name: AFROZ ALAM JI ,SAHARSA	DATE : 19/07/2022			
AREA STATEMENT		DESIGN BY:ER.KUMAR RAJAT		NAVRITH NIRMAN
GROUND BUILT UP AREA :- 1792 SQFT		CON.: 0720 4438 764		Architecture/Interior/Urban Designing/Landscaping
FLAT 1 BUILT UP AREA :- 725 SQFT		0777 9992 843		GODINDG ARENA,OPLUSE COWORK,GOLA ROAD PATNA
FLAT 2 BUILT UP AREA :- 750 SQFT				Patna-801003, email-navrithnirman@gmail.com
				PHONE NO. : +91 720 443 8764 , +91 878 978 6566